



# ST SERIES



UNLOAD SPEED


**3,500\*** POUNDS PER MINUTE

CAPACITIES

**403-1,019** CUBIC FEET

\*3,500 with the optional 12"10" auger system. 10"-8" is 1,800.

Twin floor augers lower body height and increase stability by putting more of the load closer to the frame.

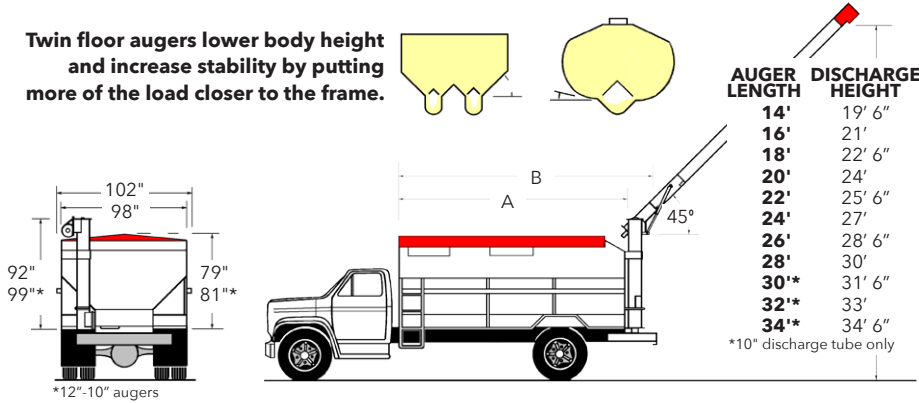

<b>SPECIFICATIONS</b>	ST-912	ST-914	ST-916	ST-918	ST-920	ST-922	ST-924	ST-926
<b>A - Body Length</b>	12'	14'	16'	18'	20'	22'	24'	26'
<b>B - Overall Length</b>	14' 5"	16' 5"	18' 5"	20' 8"	22' 8"	24' 8"	26' 8"	28' 8"
<b>Body Weight (lbs.)<sup>1</sup></b>	4,928	5,336	5,899	6,325	6,938	7,563	8,052	8,486
<b>Cab-to-Axle</b>	108"	138"	120"*	144"*	186"*	180"***	180"***	198"***
<b>Compartments</b>	2 - 3	3 - 4	3 - 4	3 - 4	4 - 5	4 - 6	4 - 6	5 - 6

<b>CAPACITIES</b>	ST-912	ST-914	ST-916	ST-918	ST-920	ST-922	ST-924	ST-926
<b>Capacity - cu. ft.</b>	403-452	481-538	550-615	619-693	687-851	755-935	823-1019	891-997
<b>Capacity - ton<sup>2</sup></b>	7.2-8.1	8.6-9.7	9.9-11	11.1-12.5	12.4-15.3	13.6-16.8	14.8-18.3	16-17.9

1 - Body weights are approximates and will vary with optional equipment.

2 - Figured using 36 pounds per cubic foot

Cab-to-axle figures are only recommendations developed from trucks commonly used by our customers. We cannot guarantee their accuracy in all situations. Consult your truck dealer for chassis recommendations.

\*Cab-to-center of tandem. \*\*Cab-to-center of triple axles. \*\*\*Cab-to-center of quad axles.

## BODY FEATURES

- All continuous welded 12 ga. construction.
- Individual compartment shut-off controls.
- Your choice of fitted tarp, Shur-Lok roll tarp, or steel top with manual crank, air or electric-over-air lid opener.
- Wide fenders for hauling bagged feed.
- Weather tight vinyl-coated nylon tarp top.

## AUGER/HYDRAULICS

10"-8" AUGER SYSTEM STANDARD. 12"-10" OPTIONAL

- **Standard 10"-8"**: Twin 6" floor augers, 10" cross and vertical augers, and an 8" discharge auger with hanger bearings on 8 ft. intervals. 1,800 pounds per minute.
- **Optional 12"-10"**: Twin 8" floor augers, 12" vertical auger, and 10" cross and discharge augers. 3,500 pounds per minute.
- Hydraulic raise and rotate (270°) on discharge auger. Worm drive rotation for discharge auger with controls located at the driver's door.
- Reversible floor augers for rear pit discharge on front unload models.
- Direct couple tandem pumps and orbit type auger motors. 29 gallon reservoir with filter.

## The ST Series twin screw feed truck

features two floor augers that allow for a lower body height and increased stability since more of the load is closer to the frame. The steep 45 degree sloped sides make for quick unloading and the large lower body means more capacity. The ST Series feed truck is available with a 10"-8" (1,800 lbs/min) auger system or 12"-10" (3,500 lbs/min) auger system.