

READY TO MOVE A FEW THOUSAND BUSHELLS?

THE 8" OX SEED BELT CONVEYOR IS ALREADY ONE STEP AHEAD OF YOU.



Shown with optional collapsible intake



The Ox is built for flexibility, ranging from 17' to 32' with either steel or collapsible intakes. Just because it's a midsize conveyor, doesn't mean you'll sacrifice efficiency, because the Ox 8" Seed Belt Conveyor can move 2,000 bushels per hour. All in a day's work for Ox.

8" SEED BELT CONVEYOR

STANDARD FEATURES

- Available in 17', 21', 25', and 32' lengths.
- Spout for gentle transition from the incline belt to the discharge.
- Top and bottom adjustments for belt tension and tracking.
- Cleated belting moves seed quickly and gently.
- Steel intake.

SPECIFICATIONS

Tube	14 ga. welded 8" tube with standard wind skirt for belt return.
Belting	12" PVC belt with 1½ x 7" cleats spaced on 6" centers. Vulcanized drive roller; self cleaning bottom roller; top and bottom SCM bearings for belt tension and tracking.
Drive	5 HP electric or 6.2 CID hydraulic drive.
Transport	Timken roller bearings for road use. 2" x 3" lower arms, 2" x 4" upper arms. 80" transport width.



OPTIONAL COLLAPSIBLE INTAKE

CONVEYOR CAPACITIES

ELEVATION	SOYBEANS
30°	2,000 BPH


Capacity is at approx. 400 FPM belt speed and will vary with material type and conveyor incline. Consult your seed dealer for belt speed recommendations. Hydraulic drive allows a wide range of belt speeds.

OPTIONAL FEATURES

- Optional folding intake
Allows the conveyor to reach low clearance seed outlets in trucks, wagons, etc. When the conveyor is in position, the intake is raised, minimizing spillage.




GENTLE TRANSITION SPOUT

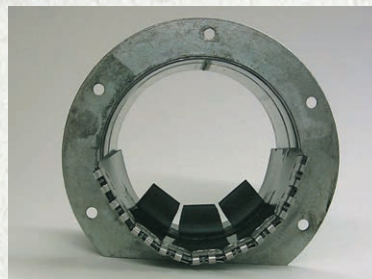

CLEATED BELTING

REACH & ELEVATION (30° incline)

	AUGER LENGTH			
	17'	21'	25'	32'
A - Elevation	9'	11' 6"	13' 6"	16' 6"
B - Distance	16' 6"	19' 8"	23' 6"	29' 6"
C - Height	7'	9' 9"	9' 9"	13'
D - Reach	2' 8"	4' 8"	6'	6' 6"

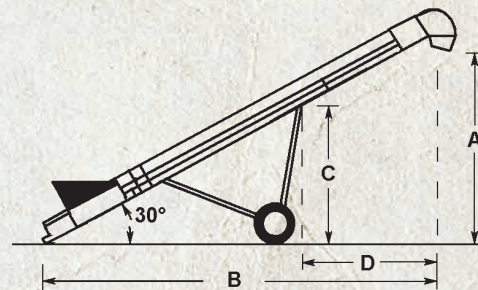

THERE'S WORK TO DO.

Sudenga Industries • Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA
1-888-SUDENGA (783-3642) • Fax: 1-712-475-3320 • sales@sudenga.com • www.sudenga.com