

GRAIN > PORTABLE AUGERS >  
**TRUCK HOPPER**



Short elevation and high capacities situation? Try the Ox Truck Hopper on for size, with its 6- or 8-foot incline tubes and capacities up to 6,500 BPH. Versatile and well-balanced, Sudenga's truck hopper comes with electric or hydraulic drive.

**Sudenga**<sup>®</sup>  
**INDUSTRIES, INC.**



- Fill elevator legs, portable augers, silage blowers, etc from gravity wagons or grain trucks.
  - 6' or 8' incline tubes
  - Capacities up to 6,500 BPH
  - Electric or hydraulic drive
- Hopper - 14 ga.; splash guard on intake

Learn more  
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320  
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA  
sales@sudenga.com | www.sudenga.com

**MADE**  
**IN THE**  
**USA**

# GRAIN > PORTABLE AUGERS > TRUCK HOPPER



## No-nonsense. This Truck Hopper doesn't mess around.

Short elevation and high capacity situation? Try the Ox Truck Hopper on for size. 6' or 8' incline tubes and capacities up to 6,500 BPH. It's versatile and it's well-balanced. Available in electric or hydraulic drive. It gets in, and then it gets out. No funny business.



## POWER REQUIREMENTS

Tube Diameter	8"	10"	12"
Electric Drive*	2 HP	3 HP	5 HP
Hydraulic Drive	"H" Series		

\*For dry grain applications.

## CAPACITIES\*

8" Incline Tube	2,500 BPH
10" Incline Tube	4,500 BPH
12" Incline Tube	6,500 BPH

\*In dry grain, choose next size auger in wet grain.

## STANDARD FEATURES

### Hopper

- 14 ga. construction; splash guard on intake; access to CV-joint on hopper to incline flighting connection; flexible rubber belting; rubber end wheels; safety screen over hopper flighting; 4" flex skirt (keeps hopper full of grain, minimizes spillage, and improves low clearance access).

### Auger Tube

- 14 ga. (8" diameter) or 12 ga. (10" and 12" diameters) cold drawn welded tube.

### Flighting


- 7¼" flighting (8" incline tube), 9¼" flighting (10" incline tube), and 11¼" flighting (12" incline tube).
- 3/16" thick flight on 1½" pipe (7¼" flighting), 3/16" thick flight on 2½" pipe (9¼" flighting), 1/4" thick flight on 2 7/8" pipe (11¼" flighting).
- Hopper flightings are 5/16" thick on all sizes.
- 10" hoppers have reduced pitch flighting.



## HOPPER DIMENSIONS

	8" x 6'	8" x 8'	10" x 6'	10" x 8'	12" x 8'
A	8' 11¼"	10' 9"	8' 11"	10' 8½"	10' 8¼"
B*	25½"	36¼"	25"	36"	34¾"
C*	10¾"	10¾"	13"	13"	13"
D**	28½"	28½"	32¼"	32¼"	32¼"

\*"B" and "C" dimensions are for standard 6" end wheels in top-mount holes. Add 1" for 6" wheels in lower mount holes or optional swivel end wheels. \*\*"D" dimension is for hopper width inside of hopper skirt.

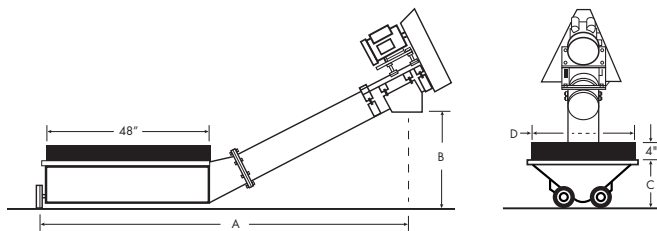

## OPTIONAL FEATURES

- **Transport:** Tube mounted undercarriage that makes moving the hopper easy. Includes two 4 x 8 tubeless tires.
- **Swivel wheel adaptor:** Allows fixed-end wheels to swivel 360°. Makes positioning the hopper easy.
- **Leg adaptor:** For attaching hopper discharge to the elevator leg intake. Eliminates moisture problems associated with dump pits.
- Custom lengths available on request.



Optional swivel end wheels



Wide hopper with flex skirt

Learn more  
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320  
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA  
sales@sudenga.com | www.sudenga.com