

FEED HANDLING EQUIPMENT

ROLLER MILL


Sudenga's RGS-2020 Roller Mill is available in single, double, and triple pair high setups with capacities up to 36 TPH at 500 microns. Available with roll gap automation and load compensating controls.



Sudenga®

INDUSTRIES, INC.

RGS-2020

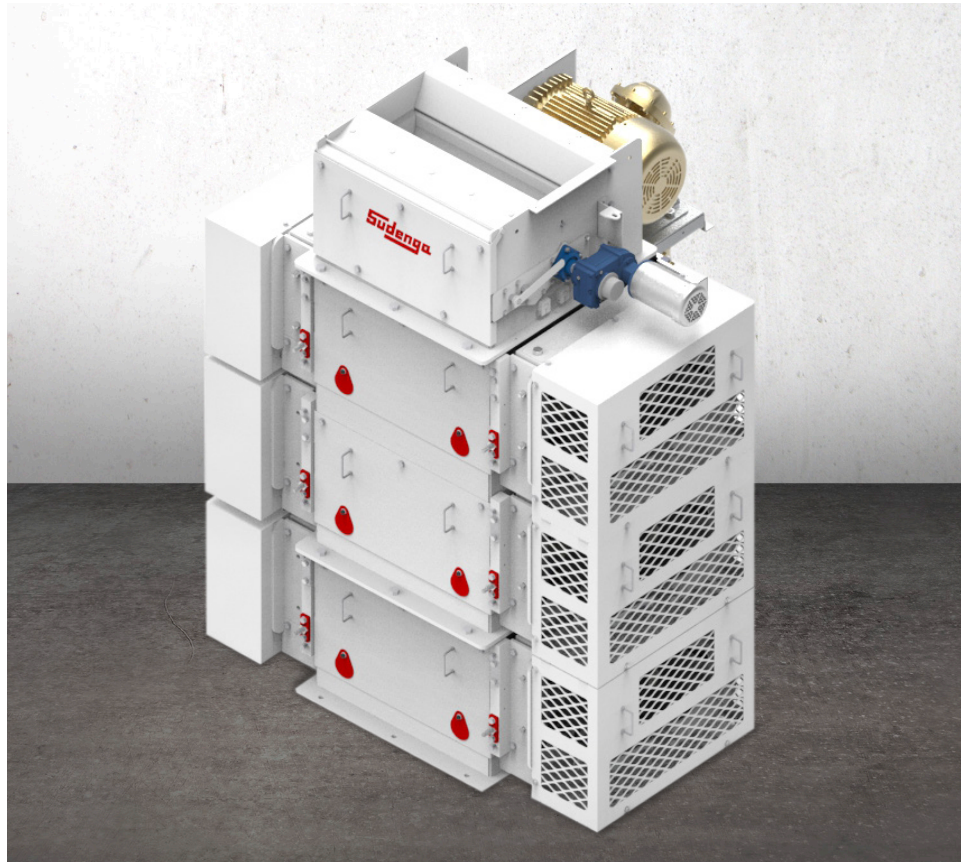

- Single, double, & triple configurations
- Capacities up to 36 TPH at 500 microns
 - Roll gap automation
 - Load compensating controls


Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
feed@sudenga.com | www.sudenga.com/feed


WWW.SUDENGA.COM

ROLLER MILL

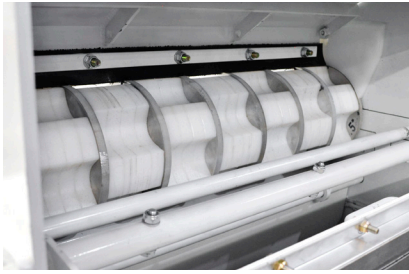

POCKET FEEDER

- Uniform flow
- Even wear on rolls
- Controllable flow rate with Variable Frequency Drive (VFD)

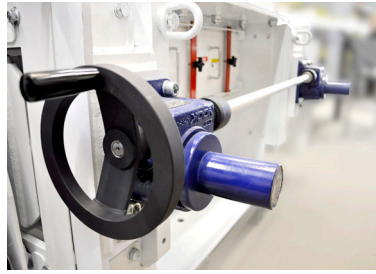


ROLL ADJUSTMENT

- Single point roll adjustment
- Manual or automatic
- Rolls remain parallel throughout movement



BEARINGS, HOUSINGS, & GREASE BANK

- Self-aligning spherical roller bearings
- Machine matched, pillow block housing
- Quick-detach grease lines
- Easy-access grease bank

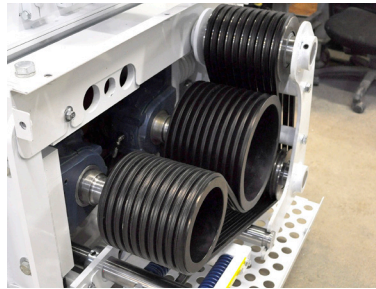


INTER-DRIVE

- Use of Hi-Power® Dubl-V Belts
- High tensile springs used for belt tensioning

ROLLS & SHAFTS

- High quality chilled iron, solid cast rolls
- Corrugations for various applications

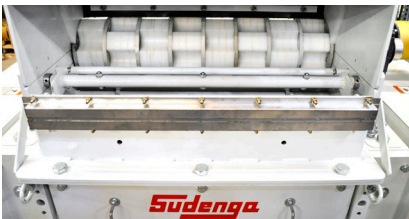


MAGNET

- Plate-style magnet
- Prevents metal from getting in rolls
- Remove magnet for easy cleaning



Easy access feed sample slots
Robust frame for trouble free operation.

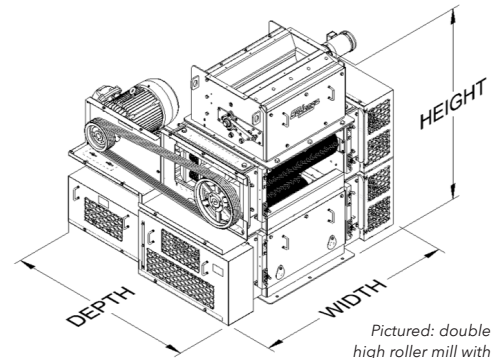

Pictured: double high roller mill with rotary feeder.

SPECIFICATIONS

Single Pair	Height	Width	Depth
SHRG-1224	49.0"	67.86"	78.85"
SHRG-1230	49.0"	73.86"	78.85"
SHRG-1236	49.0"	82.21"	78.85"
SHRG-1242	49.0"	88.21"	78.85"
SHRG-1252	49.0"	98.21"	78.85"
Double Pair	Height	Width	Depth
DHRG-1224	74.87"	67.86"	78.85"
DHRG-1230	74.87"	73.86"	78.85"
DHRG-1236	74.87"	82.21"	78.85"
DHRG-1242	74.87"	88.21"	78.85"
DHRG-1252	74.87"	98.21"	78.85"
Triple Pair	Height	Width	Depth
THRG-1224	100.75"	67.86"	78.85"
THRG-1230	100.75"	73.86"	78.85"
THRG-1236	100.75"	82.21"	78.85"
THRG-1242	100.75"	88.21"	78.85"
THRG-1252	100.75"	98.21"	78.85"

*Subject to change

Height of Feeder: 23.12"

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
feed@sudenga.com | www.sudenga.com/feed