

BULK SEED HANDLING EQUIPMENT >

UNDERCAR BELT HOPPER



The Sudenga Undercar Belt Hopper is designed to move seed from low clearance hopper bottom trailers, trucks, or wagons. Its transport winches up, allowing the hopper to be swung easily, plus, it's balanced to make the whole unit easy to move.

Sudenga[®]

INDUSTRIES, INC.



WWW.SUDENGA.COM

- 12" x 15' conveyor with 14" belting
- Capacities to 4000 BPH (5000 CFH)
 - Transport winches up, allowing the hopper to be swung around easily.
- Transport raises the discharge point an additional 7" from a "level hopper" position.
- Discharge has an oversized handle to make moving the hopper easy.
- A remote lever collapses the hopper shroud for extra clearance and raises to minimize spillage.
 - Spout is designed for gentle transition from incline to discharge.

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com

MADE
IN THE
USA

BULK SEED HANDLING EQUIPMENT >

UNDERCAR BELT HOPPER



Need for seed. Put the Ox undercar belt hopper to work. The Ox Undercar Belt Hopper is designed to move seed from low clearance hopper bottom trailers, trucks or wagons. Its transport winches up, allowing the hopper to be swung easily. And the discharge even has an oversized handle to make moving the hopper an easy task. You'll be tempted to march it in the big parade, but you should probably just let it get to work. No fuss.

STANDARD FEATURES

- 12" x 15' conveyor with 14" belting
- Capacities to 4000 BPH (5000 CFH)
- Transport winches up, allowing the hopper to be swung around easily.
- Transport raises the discharge point an additional 7" from a "level hopper" position.
- Discharge has an oversized handle to make moving the hopper easy.
- A remote lever collapses the hopper shroud for extra clearance and raises to minimize spillage.
- Spout is designed for gentle transition from incline to discharge.

OPTIONAL FEATURES

- Electric or hydraulic drive.



Hopper shroud




Transport jack

SPECIFICATIONS

Tube	12 ga. mild steel tube - 12" diameter.
Belting	14" PVC belt with crescent top surface. 4" vulcanized drive roller; 4" self cleaning bottom roller; top and bottom bearings for belt tension and tracking.
Drive	Electric Drive - 400 FPM belt speed (variable by changing motor pulley). 5 HP is recommended (motor not included). Adverse conditions may require 7½ HP. Hydraulic Drive - includes 6.2 CID "H" Series motor.
Spout	Opening is 10" wide and 9" deep.

REACH & ELEVATION

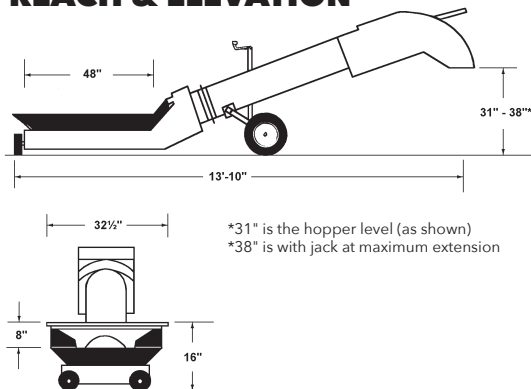

**MADE
★ IN THE ★
USA**

*Learn more
or get a quote*



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
 PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
 sales@sudenga.com | www.sudenga.com