BIG, FAST AND PORTABLE. CAREFUL, THE NEIGHBORS ARE BOUND TO STARE.


THE DRIVE OVER HOPPER 125 IS READY TO GET TO WORK.

Sudenga



Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA 1-888-SUDENGA (783-3642) • 1-712-475-3301 Fax: 1-712-475-3320 • sales@sudenga.com • www.sudenga.com








STANDARD FEATURES

Capacities	10,000 or 12,500 BPH		
Deck Height	9¾"		
Transport	Hydraulic transport raise options; ramps feature spring-assist for easy set up and knock down		
	Removable hitch Hitch jack		
Hoppers	• 45" × 45" center dump for trucks and trailers		
	• 24" x 40" side dump for gravity wagons (side dump folds down to cover the grate when not in use)		
Tractor Hydraulic Requirements	18 GPM at 2,000 PSI		

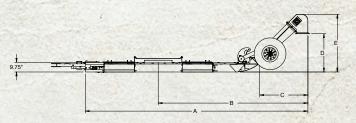

HOPPER DIMENSIONS

	Standard Incline	3' Extension	4' Extension	5' Extension	6' Extension
Α	18' 6"	20'7"	21' 4"	22'	22′9″
В	12′ 5″	14′ 6″	15' 3″	18′ 9″	16′ 8″
С	4'	6' 1"	6′ 10″	7'6	8' 3"
D*	3' 2"	5' 3″	6'	6' 8"	7′ 5″
E	4'9"	6' 10"	7'7"	8'3"	9'

*Optional 14" square spout will reduce by 1' 4"



OPERATING POSITION TO TRANSPORT POSITION WITH A PUSH OF A BUTTON

WIDE INTAKE HOPPER

*SHOWN WITH OPTIONAL NECK EXTENSION




COMPACT HYDRAULIC AXLE ROTATION

RAMPS FOLD UP FOR EASY TRANSPORT



PORTABLE DRIVE OVER HOPPER 125

- Hydraulic power
- 10 ga. construction
- Heavy double D81x chain with reinforced UHMW paddles
- Rubber belting around center dump opening
- Separate inlets for gravity wagons and hopper trailer
- Straight, tapered, or flanged discharge openings; 14" x 40" standard discharge opening.
- Optimized axle placement for reduced tongue weight

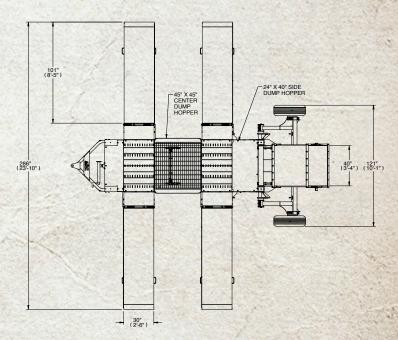

OPTIONAL FEATURES

- Speed control valve kit: hydraulic drive
- Discharge neck extensions in 3', 4', 5' and 6' lengths
- Flanged square spout 14"
- Hitch jack
- Wagon hopper dump