

GRAIN > PORTABLE AUGERS >

# DRIVE OVER HOPPER 125



The Ox Portable Drive Over Hopper 125 is ready to get to work.  
Fast, convenient unloading from straight trucks, semis and gravity wagons.  
Proven low-profile design. Durable drag chain conveyor format. Speeds up to 12,500 BPH.

# Sudenga®

INDUSTRIES, INC.



Shown with optional neck extension, optional flanged spout, and optional gravity flow wagon dump.

- 10 ga. construction
- Heavy double D81X chain with reinforced UHMW paddles
  - Rubber belting around center dump opening
- Separate inlets for gravity wagons and hopper trailer
- Optimized axle placement for reduced tongue weight


Learn more  
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320  
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA  
sales@sudenga.com | www.sudenga.com

**MADE**  
★IN THE★  
**USA**


# DRIVE OVER HOPPER 125

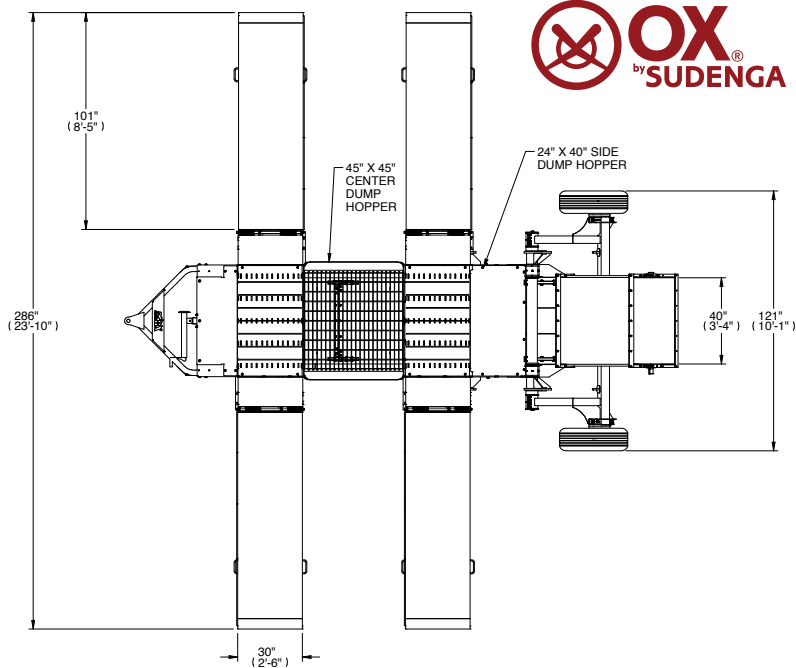

## SPECIFICATIONS

|                                       |                                                                                                                                             |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capacities</b>                     | 10,000 or 12,500 BPH                                                                                                                        |
| <b>Deck Height</b>                    | 9¾"                                                                                                                                         |
| <b>Transport</b>                      | Hydraulic transport raise options; ramps feature spring-assist for easy set up and knock down<br><br>Removable hitch<br><br>Hitch jack      |
| <b>Hoppers</b>                        | 45" x 45" center dump for trucks and trailers<br><br>24" x 40" side dump for gravity wagons. Folds down to cover the grate when not in use. |
| <b>Tractor Hydraulic Requirements</b> | 18 GPM at 2,000 PSI                                                                                                                         |

## HOPPER DIMENSIONS

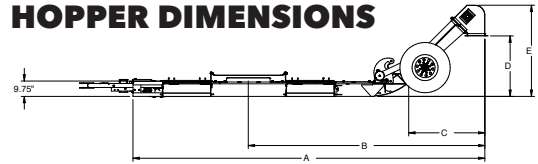

|           | Standard Incline | 3' Ext. | 4' Ext. | 5' Ext. | 6' Ext. |
|-----------|------------------|---------|---------|---------|---------|
| <b>A</b>  | 18' 6"           | 20' 7"  | 21' 4"  | 22'     | 22' 9"  |
| <b>B</b>  | 12' 5"           | 14' 6"  | 15' 3"  | 16'     | 16' 8"  |
| <b>C</b>  | 4'               | 6' 1"   | 6' 10"  | 7' 6"   | 8' 3"   |
| <b>D*</b> | 3' 2"            | 5' 3"   | 6'      | 6' 8"   | 7' 5"   |
| <b>E</b>  | 4' 9"            | 6' 10"  | 7' 7"   | 8' 3"   | 9'      |

\*Optional 14" square spout will reduce by 1' 4"

## OPTIONAL FEATURES

- Speed control valve kit: hydraulic drive
- Discharge neck extensions in 3', 4', 5' and 6' lengths
- Flanged square spout 14"
- Hitch jack
- Wagon hopper dump



Operating position to transport position with a push of a button



Compact hydraulic axle rotation



Wide intake hopper

Learn more  
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320  
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA  
sales@sudenga.com | www.sudenga.com